
durashine®

TATA BLUESCOPE STEEL



Introducing
Hi-Rib 32

DURASHINE® Roofs
Now upto 40% stronger

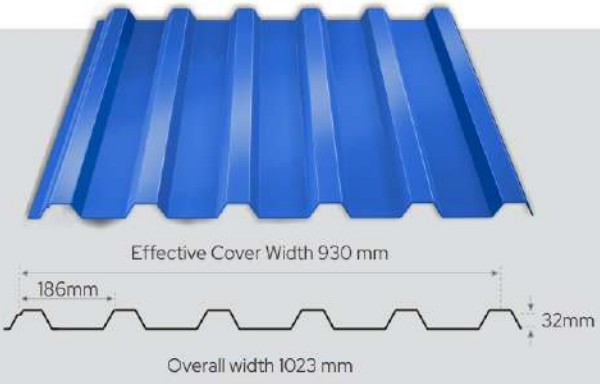

Setting New Standards in Strength and Durability!



Agricultural Sheds



Industrial Sheds


Ideal solutions for Roof and Wall cladding for Agricultural Sheds, Warehouses, Industrial Sheds, Sports Complex, Community Hall and Parking Sheds etc.



Strong and Light Weight



Leak Proof Performance



Excellent Spanning Capability



Aesthetics Appealing

Roof Specifications	
Total Painted Thickness (mm)	0.37 / 0.47 / 0.52 / 0.62
Sheet length* (mm)	2440 (8ft), 3050 (10ft), 3660 (12ft), 4270 (14ft), 4880 (16ft), 5490 (18ft), 6100 (20ft), 6710 (22ft), 7320 (24ft)
Effective cover width (mm)	Nominal 930
Overall width (mm)	Nominal 1023
Minimum roof slope (degrees)	5


* Sheet length in feet is approximate value

Maximum Support Spacing (mm)*		
Type of Span	Roof	Wall
Single Span	950	1700
End Span	1200	2450
Internal Span	1750	2850

*Above spacing is for 0.43 mm (BMT). T & C Apply


DURASHINE® Hi-Rib32

Hi-Rib comes with an Anti-Capillary groove, ensuring leak proof performance

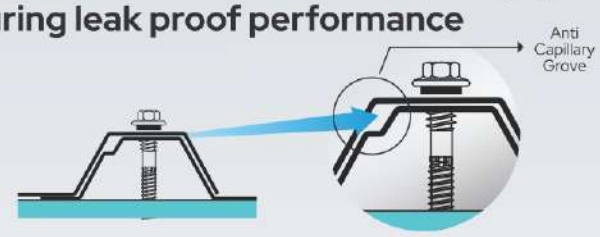


DURASHINE® Compatible Accessories

DURASHINE® Accessories are compatible with Hi-Rib roof and available in spectrum of colors to perfectly complement your project.

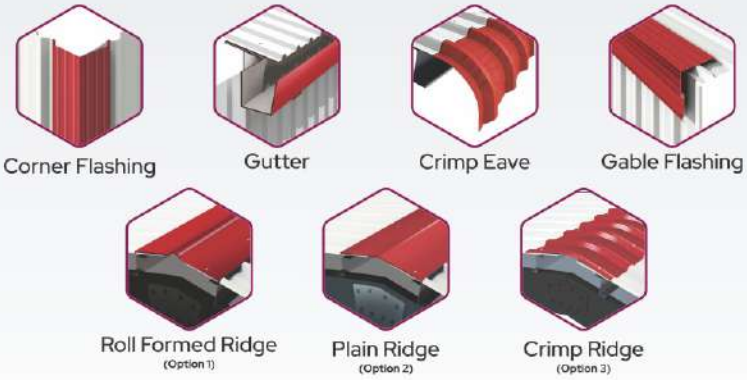


Disclaimer on Condensation

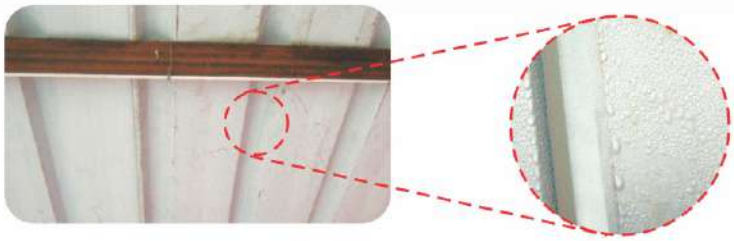

Disclaimer: Condensation is the natural formation of water droplets on the bottom side of any installed metal roofing sheet. It may occur when there is a difference in temperature between the air in the building and the sheet itself, causing the water vapour (moisture) in the air to condense on the inside of the sheet. It is a natural phenomenon and hence no claims will be entertained in this regard.

The risk of condensation may be minimised by providing proper ventilation arrangement in the roofs and by using suitable insulation.

Benefits of DURASHINE®

DURASHINE® HI-Rib 32 Roof Sheets	Ordinary Roof Sheets
	
High Rib Height = More Strength	Low Rib Height = Less Strength
	
High strength with High Rib requires less support and hence cost effective	Low Rib requires more support and adds additional cost
	
Hi strength = Excellent dent resistance	Low Strength = prone to dent
	
DURASHINE® Hi-Rib doesn't bend and doesn't retain water	Ordinary sheets bend easily and collects water causing rusting

Available Standard Colours*

Asian White™	Cool Blue™	Nuvo Blue™	Bright Green™	Pearl Green™	Castle Red™	Passion Red™	Cherry Red™	Coffee™	Smart Grey™

Instructions for fasteners: Use carbon free washers with class 3 fasteners for installing DURASHINE® roofs and accessories

Maintenance Recommendation: Clean and maintain your roof regularly to remove dust and dirt.

Colour shades are for reference only and actual colour of the product may vary. Colour range and product range is subject to availability. The above product is subject to the guidelines available at www.tatabluescopesteel.com and this shall not be construed as warranty or guarantee of the product of any kind whatsoever.

Dealer Name and Address

durashine®

Download the Tata BlueScope Steel App

App Store | Google play

1800 270 8333
Toll Free

Email: durashine@tatabluescopesteel.com
Website: www.tatabluescopesteel.com

Follow us on Social Media

Tata BlueScope Steel Pvt. Ltd. CIN: U45209PN2005PTC020270 Regd. Office: Floor No. 9 & 10, Kalpataru Infinia, Final Plot No. 21, Sub Plot No. 3 at CTS No. 15/1, Wakdewadi, Shivajinagar, Pune – 411003, Maharashtra, India. DURASHINE® is registered trademark of Tata BlueScope Steel Pvt. Ltd ©2024 Tata BlueScope Steel Pvt. Ltd. All rights reserved. ©2024

English / 0524